


TECHNICAL DATA SHEET

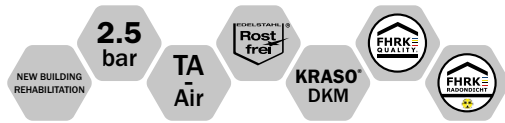

KRASO® Sealing Insert Universal Multiple - split -

Application areas


For core drillings or casings, for installation of several media lines/cables.

Technical details

- + **KRASO® Sealing Insert quality:** 5 mm thick clamping plates, a specially developed rubber mixture with even better sealing characteristics, welded-on studs instead of through bolts
- + Torque Control Nut **KRASO® DKM**: integrated torque limiter - no torque wrench required!
- + **Stepless onion ring technology:** universally usable for various external diameters of media lines/cables - also for multiple installation!
- + Split design - also suitable for retrofit installation!
- + Gas- and odour tight - high-quality in terms of TA-Air!
- + Certified with the quality seal of the FHRK e. V.

Tests

- + Radon tightness IAF tested - meets the requirements for radon precautionary areas according to FHRK leaflet MB 101
- + MPA-tested: gas- and water pressure tight up to 2.5 bar
- + DafStB waterproof concrete guideline: stress class 1 + 2

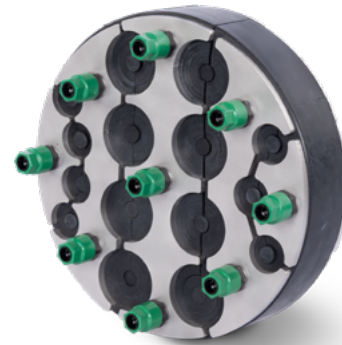


Material

Clamping plates	non-corrosive stainless steel V2A
Bolts	non-corrosive stainless steel V2A
Washers	non-corrosive stainless steel V2A
Nuts	Torque Control Nut KRASO® DKM
Seal	EPDM 50° +/- 5° Shore

TECHNICAL DATA SHEET

KRASO® Sealing Insert Universal Multiple - split -

Technical drawing

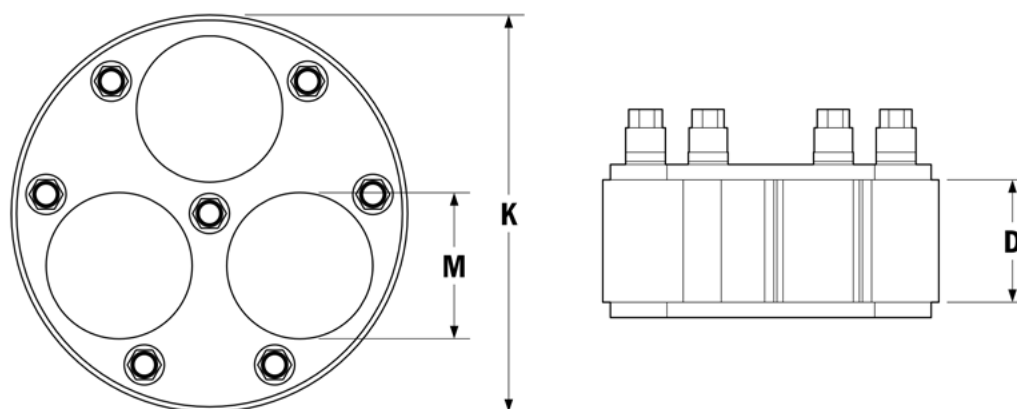

K = core drilling | **M** = media line | **D** = seal

Item

Sealing Insert Universal Multiple - split -

K (mm)	100		
D (mm)	40		
M (mm)	Design 1 4 x 6 - 33 mm or blind	Design 2 3 x 6 - 18 mm or blind 2 x 6 - 33 mm or blind	Design 3 8 x 6 - 18 mm or blind
Weight (kg)	0.6	0.8	0.8
Item no.	KDIMUNIG1001	KDIMUNIG1002	KDIMUNIG1003
K (mm)	125		
D (mm)	40		
M (mm)	Design 1 6 x 6 - 28 mm or blind		
Weight (kg)	0.9		
Item no.	KDIMUNIG1251		

TECHNICAL DATA SHEET

KRASO® Sealing Insert Universal Multiple - split -

Item

Sealing Insert Universal Multiple - split -

K (mm)	150		
D (mm)	40		
M (mm)	Design 1 3 x 6 - 52 or blind	Design 2 4 x 6 - 18 mm or blind 6 x 6 - 33 mm or blind	Design 3 6 x 6 - 38 mm or blind
Weight (kg)	1.7	1.5	1.6
Item no.	KDIMUNIG1501	KDIMUNIG1502	KDIMUNIG1503
K (mm)	200		
D (mm)	40		
M (mm)	Design 1 3 x 6 - 28 mm or blind 4 x 6 - 52 mm or blind	Design 2 7 x 6 - 18 mm or blind 8 x 6 - 33 mm or blind	
Weight (kg)	2.7	2.8	
Item no.	KDIMUNIG2001	KDIMUNIG2002	

