


TECHNICAL DATA SHEET



KRASO® System Cover KDS 150 - heat-shrink technology -

Application areas

System cover KDS 150 for installation in **KRASO®** Cable Penetration KDS 150, for installation of pipes or cables.

Technical details

- + Incl. bayonet fitting with union nut and anti-twist lock (prevents unintentional opening)
- + With 1, 3 or 7 adapters for installation of cables or pipes
- + Incl. heat-shrink hose (length approx. 20 cm) for the connection via heat-shrink technology
- + 3-fold and 7-fold with factory-installed, water pressure tight cover, simple opening by knocking off before installation (on-site)

Test

- + MPA-tested up to 1 bar!
- + DafStB waterproof concrete guideline: stress class 1 + 2




Material

System cover	PC
Union nut	ABS
Heat-shrink hose	PEX

TECHNICAL DATA SHEET

KRASO® System Cover KDS 150 - heat-shrink technology -

Technical drawing

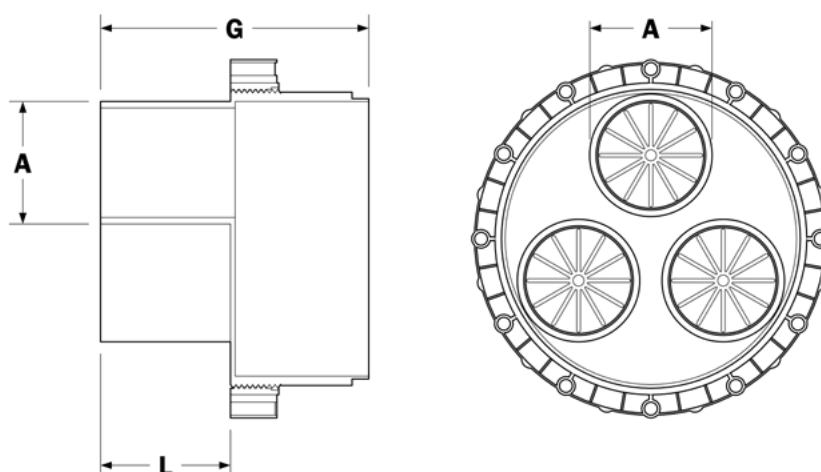

A = scope of application | **G** = total length | **L** = adapter length

Type		A (mm)	G (mm)	L (mm)	Weight (kg)	Item no.
System Cover KDS 150 - heat-shrink technology -	1-fold	1 x 34 - 115	120	44	0.54	KKDS150SDWS1
	3-fold	3 x 22 - 59	156	80	0.63	KKDS150SDWS3
	7-fold	7 x 13 - 33	146	70	0.65	KKDS150SDWS7