

TECHNICAL DATA SHEET



KRASO[®] Flange Pipe FE

Application areas


True diameter casing for retrofit installation of pipes and cables.

Technical details

- + Simple and effective integration into bituminous sealing ("black tank") using a foil flange: bitumen thick coating and reactive sealing, sheeting, concrete and brick walls
- + Made of dimensionally and pressure stable solid wall material with low abrasion! Installation even at lower temperatures

Tests


- + MPA-tested up to 1.5 bar!
- + For new buildings and rehabilitation - according to DIN 18533 W1 -E und W2.1 -E

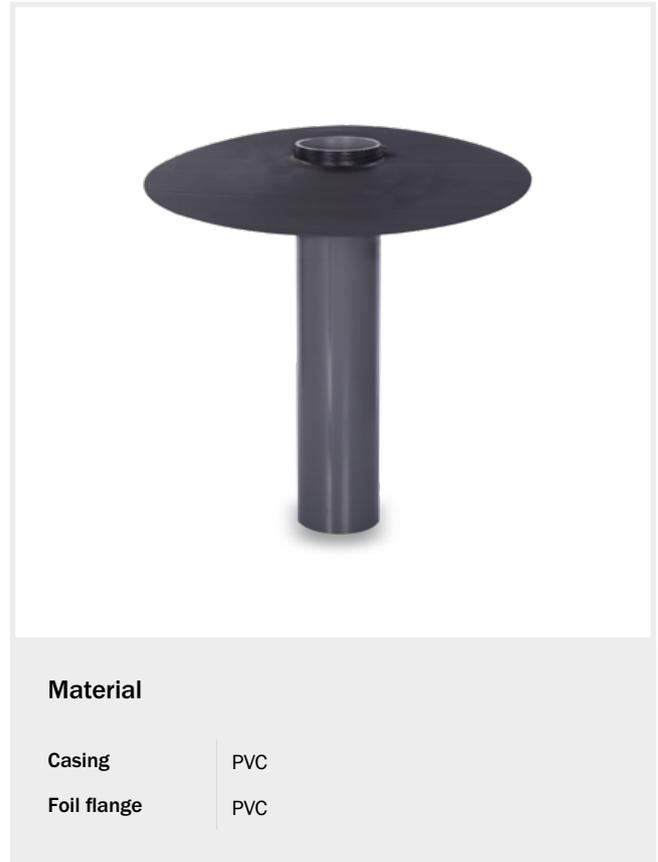

TECHNICAL DATA SHEET

KRASO[®] Flange Pipe FE

Technical drawing

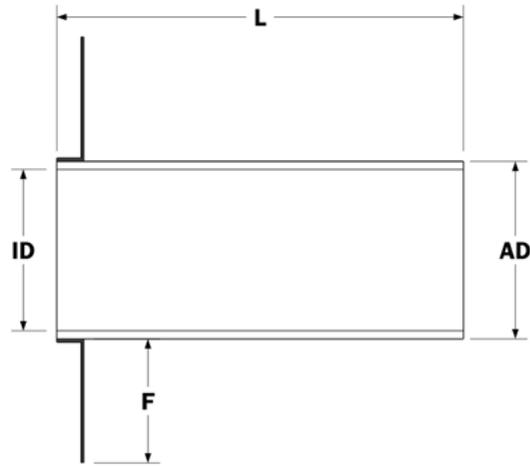

ID = pipe internal | **AD** = pipe external | **L** = wall thickness | **F** = foil flange (surrounding)

Item	ID (mm)	AD (mm)	L (mm)	F (mm)	Weight (kg)	Item no.
Flange Pipe FE	100	110	500	150	1.9	KFFE100500
	125	134	500	150	2.6	KFFE125500
	150	158	500	150	2.8	KFFE150500
	200	208	500	150	3.0	KFFE200500
	250	260	500	150	4.1	KFFE250500
	300	315	500	150	5.0	KFFE300500