

TECHNICAL DATA SHEET



KRASO® Wall Collar Lightning Protection Duo

Application area


For the water pressure tight integration of earthing cables with factory-sealed openings: square earthing strap (30 x 3.5 mm) and earthing wire (ø 8 – 10 mm)

Technical details

- + With Torque Control Wrench **KRASO® DKS**:
the use of the **KRASO® DKS** guarantees a precise and secure tightening force when installing the clamping bands.
The optimal torque is achieved when the wrench reaches a defined breaking point.

Tests


- + MPA-tested up to 5 bar
- + Resistant to methane gas
- + Radon-tight – according to FHRK leaflet MB 101
- + DafStB waterproof concrete guideline: stress class 1 + 2

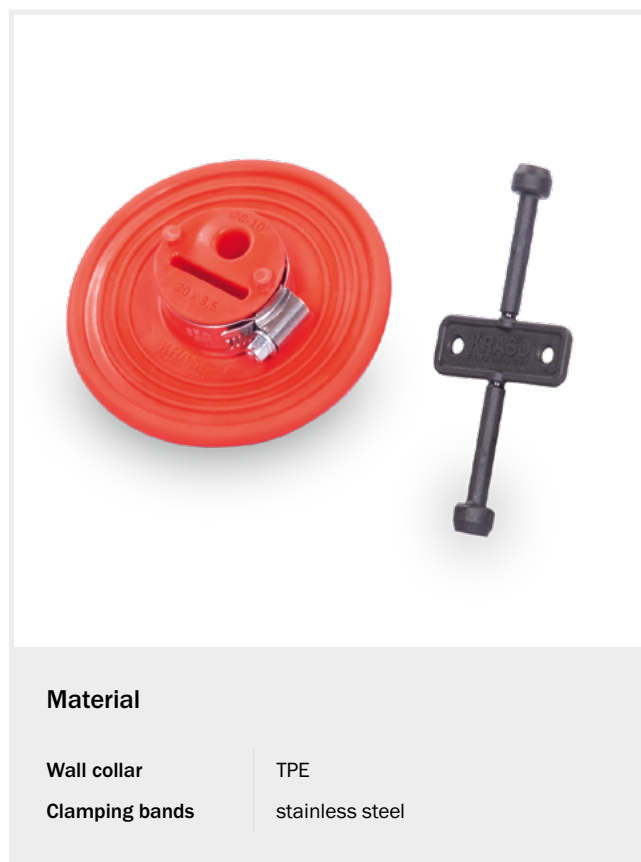

TECHNICAL DATA SHEET

KRASO® Wall Collar Lightning Protection Duo

Technical drawing

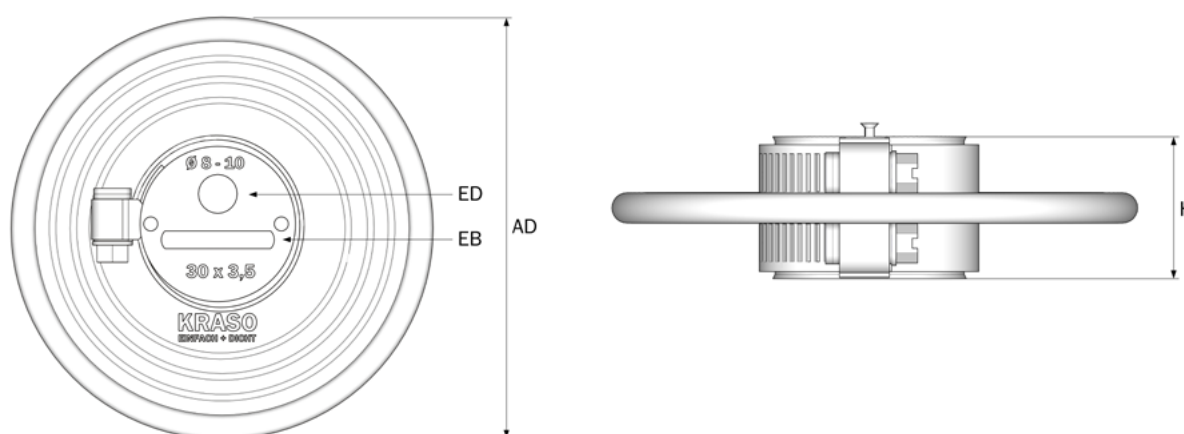

| **AD** = external diameter | **ED** = earthing wire | **EB** = earthing strap | **H** = height

Type	AD (mm)	ED (mm)	EB (mm)	H (mm)	Weight (kg)	Item no.
Wall Collar Lightning Protection Duo	114	8 - 10	30 x 3.55	38	0.172	KMKBSD