


... for more than 40 years +

KRASO®

SIMPLE + TIGHT

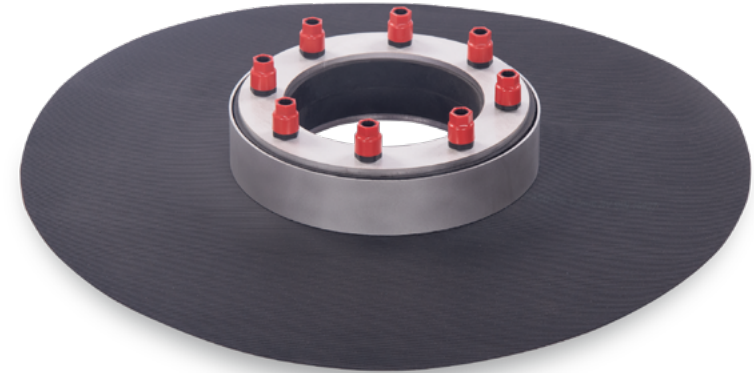

All rights to the drawings and designs are the property of KRASO GmbH & Co. KG. •
Reproduction and distribution of the drawings as well as any other use require our written consent. •



KRASO GMBH & CO. KG
Baumannweg 1 | DE-46414 Rhede
T +49 (0) 28 72 - 95 35 - 0
info@kraso.de | **KRASO.de**


1.11.1-MA.EN-v1.0-06.25-RSc.DK



KRASO® Foil Clamping Flange Type FKF

- in front of the wall -

Installation instructions

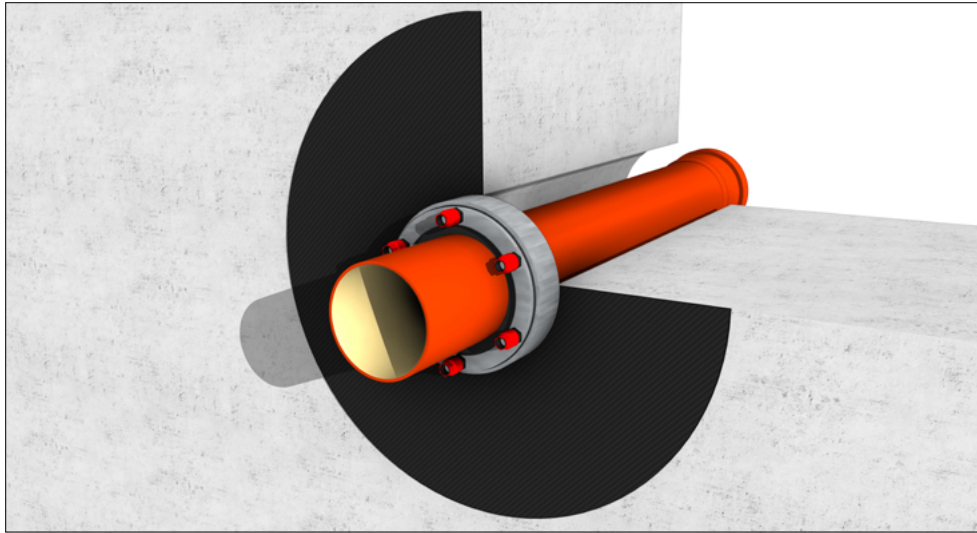

KRASO® Foil Clamping Flange Type FKF - in front of the wall -

For the sealing of media of all kinds of materials in front of a wall, with foil flange 1.2 mm, according to DIN 16937, oil- and bitumen resistant, surrounding approx. 15 cm, 30 mm seal
| DIN 18533 W1 -E and W2.1 -E

1. Initial situation: remove dirt, dripping water and residues of old waterproofing before applying the thick coating.
2. Push the **KRASO®** Foil Clamping Flange over the pipe up to the wall.
3. Mark the foil flange.
4. Remove the **KRASO®** Foil Clamping Flange and apply **KRASO®** PU 50.
5. Spread **KRASO®** PU 50.
6. Push the **KRASO®** Sealing Insert up to the wall. Press on the foil flange.
7. Press the foil flange evenly from the inside to the outside using the pressure roller.
8. Tighten the Torque Control Nuts **KRASO®** DKM crosswise step by step.
Tighten the Torque Control Nuts **KRASO®** DKM until you hear a "click".
9. Apply the bituminous (black) sealing according to the manufacturer's instructions.

