

... for more than 40 years +

KRASO®

SIMPLE + TIGHT



All rights to the drawings and designs are the property of KRASO GmbH & Co. KG. •
Reproduction and distribution of the drawings as well as any other use require our written consent. •




KRASO®

System Cover KDS 150 - heat-shrink technology
Installation instructions



KRASO GMBH & CO. KG
Baumannweg 1 | DE-46414 Rhede
T +49(0)28 72 - 95 35-0
info@kraso.de | **KRASO.de**

4.20-MA.EN-v1.0-09.25-RSc.DK

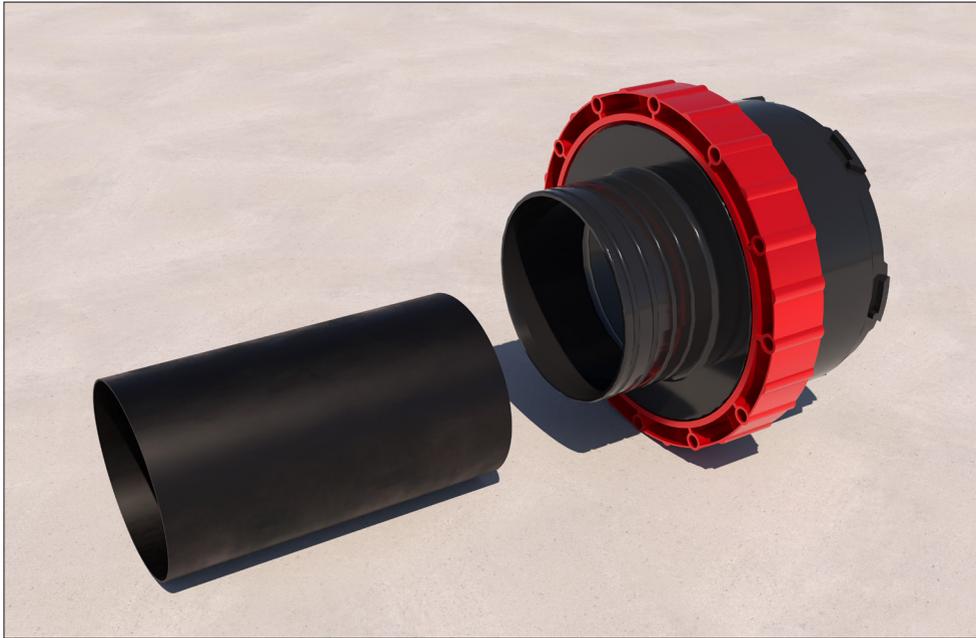

KRASO® System Cover KDS 150 - heat-shrink technology

Incl. bayonet fitting with union nut and anti-twist lock (prevents unintentional opening), with 1, 3 or 7 adapters for installation of pipes or cables, incl. heat-shrink hose (length approx. 20 cm), connection via heat-shrink technology, **KRASO® System Cover KDS 150 - heat-shrink technology** - 3-fold and 7-fold with factory-installed, water pressure tight cover, simple opening by knocking off before installation (on-site). | DafStB waterproof concrete guideline: stress class 1 + 2

1. Loosen the KDS 150 closure cover in the direction of the arrow using the **KRASO® Y-Wrench**.
2. Clean the **KRASO® Cable Penetration KDS 150** including the bayonet fitting.
3. Screw the **KRASO® System Cover KDS 150 - heat-shrink technology** firmly into the bayonet fitting.
4. Tighten the red union nut of the **KRASO® System Cover KDS 150 - heat-shrink technology** until it is completely seated on the frame.
5. Install media line. *With **KRASO® System Cover KDS 150 heat-shrink technology 3-fold and 7-fold**, the opening is created by simply knocking it out before installation (on site).
6. Insert the heat-shrink hose over the media line as far as it will go.
7. Shrink the heat-shrink hose all around using a hot air gun.

