

... for more than 40 years +

All rights to the drawings and designs are the property of KRASO GmbH & Co. KG. •
The reproduction and distribution of the drawings as well as any other use require our written consent. •



KRASO GMBH & CO. KG
Baumannweg 1 | DE-46414 Rhede
T +49 (0) 28 72 - 95 35 - 0
info@kraso.de | **KRASO.de**

4.22-MA.EN-v1.0-10.25-TAS.DK


KRASO®

SIMPLE + TIGHT



KRASO®

System Cover KDS 90 with shrink hose
Installation instructions

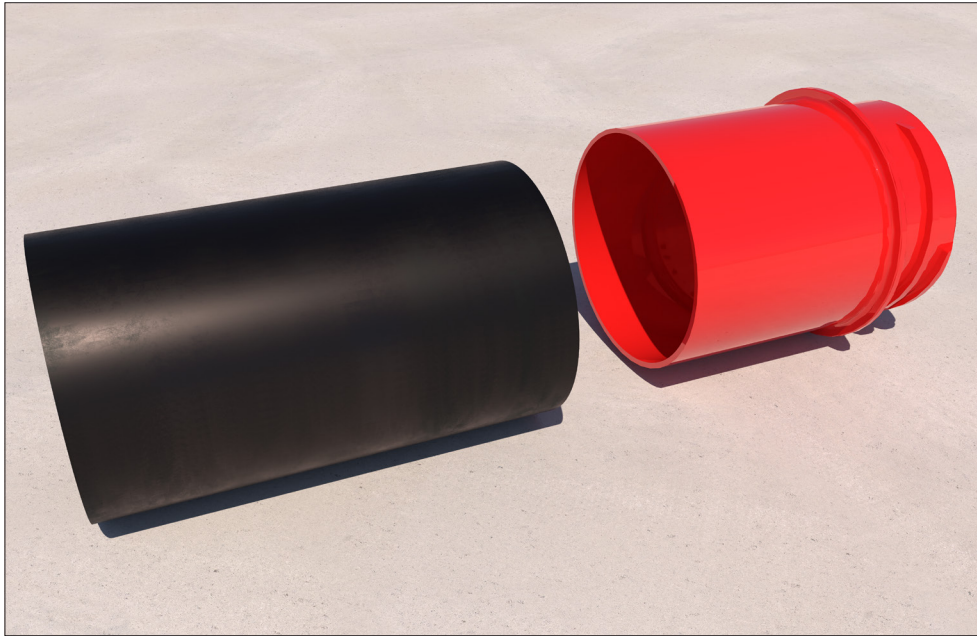

KRASO® System Cover KDS 90 with shrink hose

KRASO® System Cover KDS 90 including shrink hose
| DafStB waterproof concrete guideline: stress class 1 + 2

1. Loosen the KDS 90 closure lid in the direction of the arrow using the **KRASO®** Y-Wrench.
2. Clean the **KRASO®** Cable Penetration KDS 90 including bayonet fitting.
3. Screw the **KRASO®** System Cover KDS 90 tightly into the bayonet fitting.
4. Tighten the **KRASO®** System Cover KDS 90 clockwise until it fits securely into the frame.
5. Insert the media line.
6. Pull the heat-shrink hose over the media line as far as it will go.
7. Shrink the heat-shrink hose all around using a hot air gun.

