

... for more than 40 years +

All rights to the drawings and designs are the property of KRASO GmbH & Co. KG. •
Reproduction and distribution of the drawings as well as any other use require our written consent. •



KRASO GMBH & CO. KG
Baumannweg 1 | DE-46414 Rhede
T +49 (0) 28 72 - 95 35 - 0
info@kraso.de | **KRASO.de**


5.40-MA.EN-v1.0.09.25-RSc.DK

KRASO®

SIMPLE + TIGHT





KRASO® Floor Drain - thermally insulated - Installation instructions

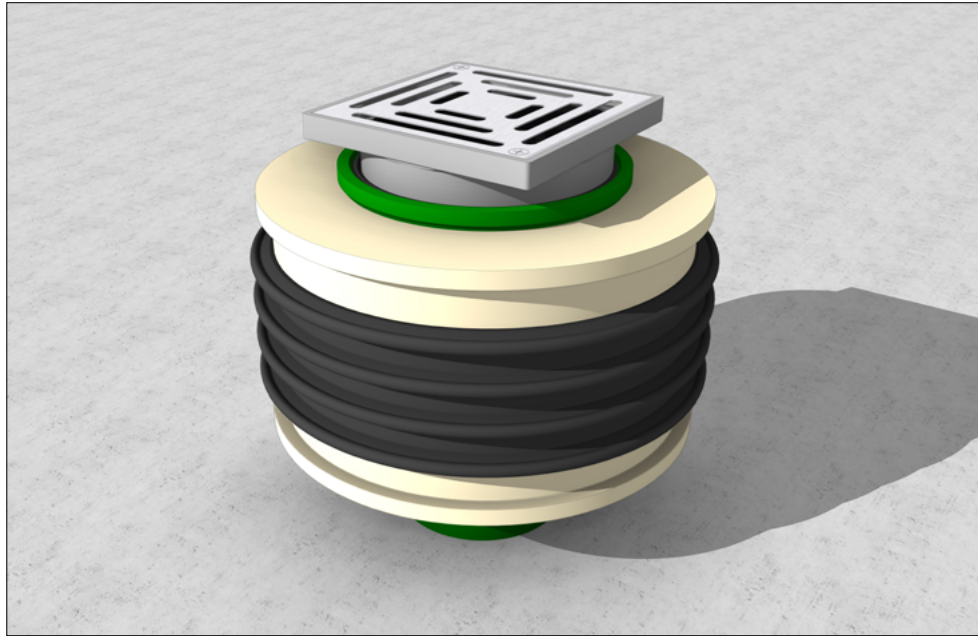

KRASO® Floor Drain - thermally insulated -

According to DIN EN 1253 – for the installation in interior areas without traffic, for the drainage of grey water, drainage capacity: 1.79 l/s, with water pressure tight surrounding, thermally welded **KRASO® 4 Seal**
| DafStB waterproof concrete guideline: stress class 1 + 2



1. **KRASO® Floor Drain - thermally insulated -** has two connection options for DN 50 and DN 110 pipes. Apply lubricant to the **KRASO® Floor Drain - thermally insulated -** and insert into the main pipe.
2. Insert **KRASO® Cover** as building period protective cover.
3. Insert support cages and upper reinforcement. TEUF = top edge unfinished floor.
4. Concrete base plate.
5. Remove the **KRASO® Cover**, clean the lip ring (if necessary).
6. Apply lubricant to insert frame and lip ring and plug them together.
7. Insert the insert frame extension (at floor level > 7 cm) with attached insert frame into **KRASO® Floor Drain - thermally insulated -**. TEFF = top edge finished floor.
8. (If necessary,) remove insert frame extension, shorten to the required length, sharpen and re-insert.
9. Align the insert frame in the desired position.
10. Construction of the floor.
11. Install sludge trap filter and stainless steel grate in the insert frame.

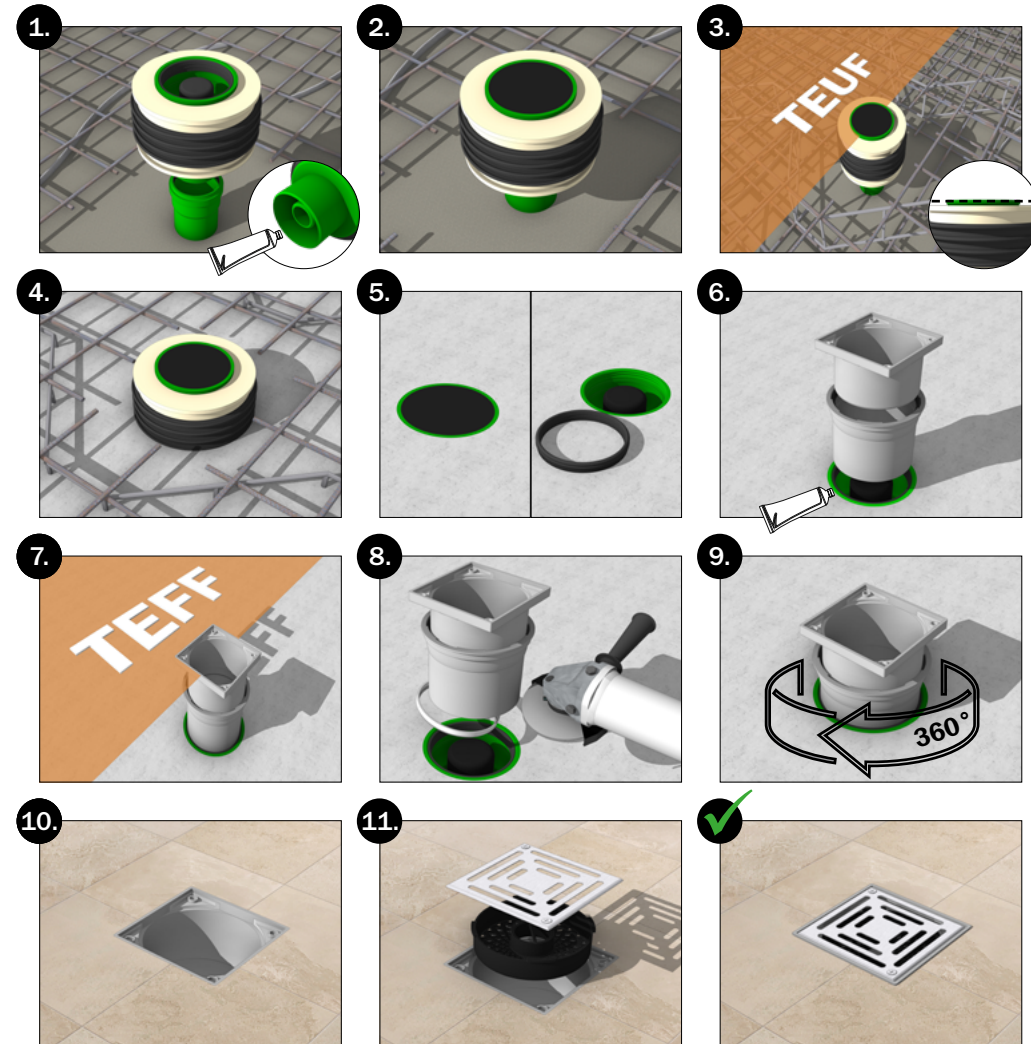

Storage

Transport

Improper transport can lead to considerable damage and costs.



If several **KRASO® Floor Drains** are to be installed, sufficient spacing between them must be observed: the distance between two **KRASO® Floor Drains** must be at least 2.5 times the diameter of the aggregate of the concrete used between the **KRASO® 4 Seals**.