

6 x 6 - 38 mm
or blind4 x 6 - 18 mm and
6 x 6 - 33 mm
or blind3 x 6 - 52 mm
or blind1 x 50 - 92 mm
or blind


Sleeve DN 160



Hose adapter DN 160



Hose adapter DN 110

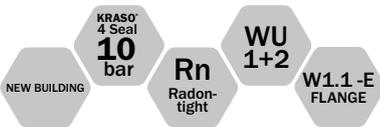

KRASO® Builder's Convenience Box - floor - 150

The safe utility connection for larger media lines

- + The safe utility connection for larger media lines for buildings without basement, e.g. electricity or water for residential buildings or commercial buildings
- + Usable with **KRASO® Sealing Insert** with large flange as utility connection entry or outlet: e.g. for charging stations in residential buildings (flat ownership modernisation law – WEMoG)
- + With water pressure tight surrounding **KRASO® 4 Seal**: exterior sealing of concrete: 10 bar!
- + Radon-tight!
- + Stable installation device incl. rigid empty pipe with bending radius from 1000 mm
- + For flush-mount installation in the base plate – no tripping hazards, no wall damages! Including building period protection cover
- + Including empty pipe insert (25 cm, internal diameter: 150 mm) for a flexible floor construction
- + Internal installation of media lines via **KRASO® Sealing Inserts**: various designs with stepless onion ring technology
- + External optional connection possibilities: connection to **KRASO® FLS**, cable protective hoses DN 110 or DN 160 or KG empty pipe systems with DN 160
- + Optionally available: **KRASO® Trowel Flange**
- + DafStB waterproof concrete guideline: stress class 1 + 2, DIN 18533 W1.1 -E



Optional
KRASO®
Trowel Flange



KRASO®
Empty Pipe Insert

KRASO® Builder's Convenience Box - floor - 150 **LG 5**

single utility connection for supply lines, for buildings without basement, with water pressure tight surrounding **KRASO® 4 Seal** | **DafStB waterproof concrete guideline: stress class 1 + 2, DIN 18533 W1.1-E**

Type / Item	KRASO® BKP - floor - 150			
Height to TEUF in mm	approx. 1220			
Height-adjustable to TEFF in mm to max.	approx. 1470			
Bending radius mm	1000			
KRASO® KRASO Sealing Insert with large flange optionally:	Design 1	Design 2	Design 3	Design 4
Stepless onion ring technology: external diameter cable from ... to ... in mm	3 x 6 - 52 mm or blind	4 x 6 - 18 mm and 6 x 6 - 33 mm or blind	6 x 6 - 38 mm or blind	1 x 50 - 92 mm or blind
KRASO® System Cover KDS - optionally:	Design 1	Design 2	Design 3	
	Hose adapter 160	Hose adapter 110	Sleeve DN 160	
KRASO® BKP - floor - 150	821 €			
optionally: KRASO® Trowel Flange	93 €			

Scope of supply: rigid empty pipe 150 incl. stable installation device, empty pipe insert ID150, approx. 25 cm, **KRASO® Sealing Insert** with large flange for the installation in **KRASO® Empty Pipe Insert**, **KRASO® System Cover KDS** for the connection of on-site empty pipe



Trusting in knowledge - building tightly **KRASO®** is a member of FHRK e. V.

- + As a member of the **Fachverband Hauseinführungen für Rohre und Kabel** (*Professional association house entries for pipes and cables, FHRK e. V.*), together with other manufacturers and users such as utility companies, we develop test principles and technical guidelines that ensure the quality of sealing solutions for house entries and make them comparable.

