


## KRASO® Builder's Convenience Box - wall - NFE

### Comfortable connection to your basement: heat pump, local, district or geothermal heating

- + Heat pump or local, district or geothermal heating system each with supply and reflux!
- + For heat pumps or local, district or geothermal heating lines with diameter 110, 90, 75, 50, 40 or 32 mm, optionally available with a diameter of 125 mm
- + For core drilling and casing DN 300 (299 - 303 mm). For precast walls and in-situ concrete walls!
- + External sealing element with sealing flange according to DIN 18533! Seal width: 90 mm.
- + Gas- and odour-tight - high-quality in terms of TA-Air!
- + Certified up to 1 bar!
- + Radon tightness IAF tested - according to FHRK leaflet MB 101! Resistant to methane gas!
- + **Torque Control Nut KRASO® DKM:** integrated torque limiter - no torque wrench required!
- + Including all components for a secure grid connection of heat pump, local, district or geothermal heating, water, electricity and telecommunication!
- + Including casing pipe end plugs - warm bridges are avoided!
- + Optionally available: **KRASO® BKP - wall - NFE - Extension Set** - for cable protective hoses, **KRASO® FLS** or rigid casing pipes!
- + DafStB waterproof concrete guideline: stress class 1 + 2, DIN 18533 W1 -E and W2.1 -E

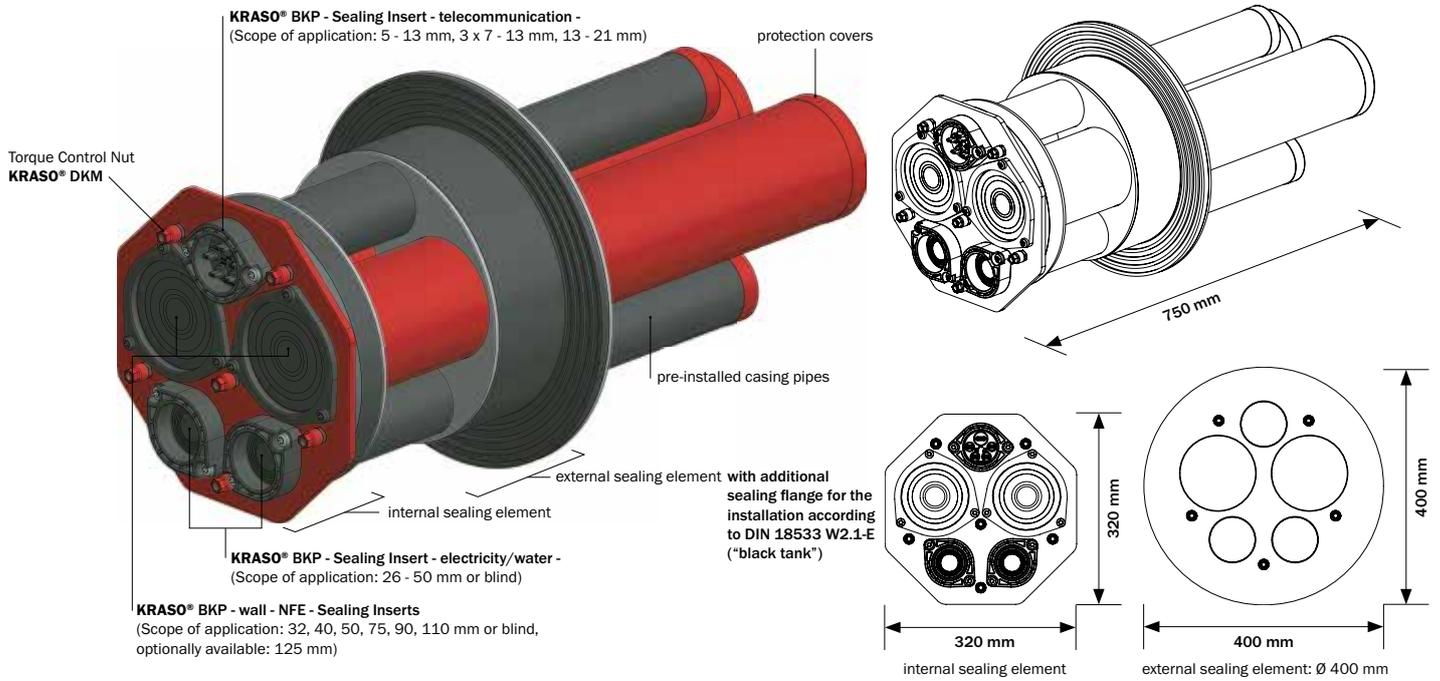

## KRASO® Builder's Convenience Box - wall - NFE **LG 5**

multi utility connection for supply lines (local, district or geothermal heating, water, electricity, telecommunication) for buildings with basement | DafStB waterproof concrete guideline: stress class 1 + 2, DIN 18533 W1 -E and W2.1 -E

Type / Item	KRASO® BKP - wall - NFE
Wall thickness from ... to ...	200 - 500 mm
Diameter core drilling min ... max ...	299 - 303 mm
Length complete system	750 mm
Length x width internal sealing element	320 x 320 mm
Diameter external sealing element	400 mm
Seal width external sealing element	90 mm
Internal diameter casing pipes	68 mm
External diameter casing pipes	75 mm
Internal diameter casing pipes NFE	118 mm
External diameter casing pipes NFE	125 mm
<b>KRASO® BKP - wall - NFE</b>	<b>1,225 €</b>

**Scope of supply:** KRASO® Builder's Convenience Box - wall - NFE including

- internal sealing element with 5 casing pipes for the installation of supply lines for heat pump, local, district or geothermal heating (supply and reflux), water, electricity and telecommunication incl. protection covers
- external sealing element
- installation instructions
- KRASO® Builder's Convenience Box - wall - NFE**
- installation kit including
  - **KRASO® BKP - wall - NFE - Sealing Insert** – 2 pcs. scope of application: 32, 40, 50, 75, 90, 110 mm or blind, optionally available: 125 mm
    - primary sealing + secondary sealing NFE
      - 2 x end plug NFE
      - 2 x hose connection 125/125

- **KRASO® BKP - Sealing Insert - electricity/water** – 2 pcs. with stepless onion ring technology 26 - 50 mm or blind
  - primary sealing + secondary sealing electricity/water
  - casing pipe end plugs including
    - end plug electricity/water - split -
    - hose connection 80
- **KRASO® BKP - Sealing Insert - telecommunication** - clamping range: 5 - 13 mm, 3 x 7 - 13 mm, 13 - 21 mm
  - primary sealing + secondary sealing telecommunication
  - casing pipe end plugs including:
    - end plug telecommunication - split -
    - hose connection 80

**Optionally available:**

- **KRASO® BKP - wall - NFE - Extension Set**

**Further wall thicknesses available on request!**