




KRASO® Floor Drain
Check the installation video
(just scan the QR code!)

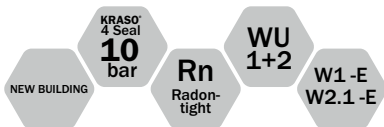

KRASO® Drains for interior and exterior use

Inside and outside – tight and dry

- + For interior areas, basements, yards and parking levels:
KRASO® Drains for a reliable and water pressure tight drainage of pressing water!
- + IAF-tested: radon-tight!
- + Walkable and fit for traffic, frost proof and odour-tight, backwater safe and thermally insulated: various versions for different needs!
- + High-quality components for a secure installation and use: solid wall material with thermally welded **KRASO® 4 Seal**, plastic or stainless steel grates
- + Additional accessories available as completion for individual needs
- + DafStB waterproof concrete guideline: stress class 1 + 2, with foil flange DIN 18533 W1-E

KRASO® Drains - according to DIN EN 1253



KRASO® Floor Drain



KRASO® Floor Drain
with foil flange



KRASO® Floor Drain
for KG 2000



KRASO® Floor Drain
- thermally insulated -

KRASO® Floor Drains - frost proof/backwater safe



KRASO® Floor Drain
Type FS frost proof




KRASO® Floor Drain
Type FS for KG 2000
with foil flange
frost proof



KRASO® Floor Drain
Type FS - RS
frost proof -
backwater safe



KRASO® Floor Drain
Type FS - RS with foil flange
frost proof -
backwater safe

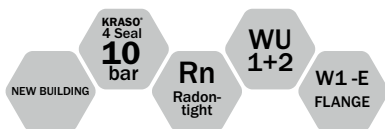

KRASO® Floor Drain Type FS for KG 2000 - frost proof **LG 1**

for the installation in exterior areas without traffic, for the drainage of grey water, drainage capacity: 1.67 l/s, with water pressure tight surrounding **KRASO® 4 Seal**. Also available with **KRASO® Foil Flange**, oil- and bitumen resistant (d = approx. 50 cm). For the integration of the foil flange, we recommend our adhesive and sealant **KRASO® PU 50**. | DafStB waterproof concrete guideline: stress class **1 + 2**, with foil flange **DIN 18533 W1-E**

Type / Item	KRASO® Type FS for KG 2000 • KRASO® Type FS for KG 2000 with foil flange
Drainage capacity	1.67 l/s
Height	drain approx. 110 mm
Insert frame	steplessly rotatable and height-adjustable from 30 - 70 mm
Stainless steel grate	class K3 (withstands loads up to 300 kg), 15 x 15 cm
Connection	KG 2000/HT pipes DN 110 vertical
KRASO® Type FS for KG 2000	208 €
KRASO® Type FS for KG 2000 with foil flange	251 €
KRASO® PU 50	22 €


Scope of supply: **KRASO® Floor Drain Type FS for KG 2000**, screwable stainless steel grate class K3, frost proof odour barrier, sludge trap filter and building period protective cover • **KRASO® Floor Drain Type FS for KG 2000 with foil flange**, screwable stainless steel grate class K3, frost proof odour barrier, sludge trap filter and building period protective cover



KRASO® Floor Drains – Accessories **LG 1**



Type / Item	Insert frame extension	Insert frame extension with foil flange	Insert frame extension - fit for traffic up to 1.5 t
Item description	height ≤ 140 mm	height ≤ 140 mm foil flange (d = approx. 50 cm)	steplessly height-adjustable from 15 - 120 mm, all visible parts made of stainless steel, stainless steel grate massive, screwed, 150 x 150 mm, fit for traffic up to 1.5 t, L 15
KRASO® Floor Drain - Accessories	21 €	61 €	180 €



Type / Item	Insert frame	Stainless steel grate	Stainless steel grate - screwable -
Item description	all visible parts made of stainless steel incl. stainless steel grate	class K3	incl. insert frame with threaded sleeves
KRASO® Floor Drain - Accessories	158 €	36 €	63 €



Type / Item	Raising element for thin-bed mortar	Spare parts kit	Floor Drain Insert frame with building period protective cover
Item description	screed structure height from 25 - 130 mm	including: backflow seal, odour stopper, sludge trap filter, insert frame and plastic grate	for industry floors treated with a power trowel
KRASO® Floor Drain - Accessories	114 €	49 €	107 €