KRASO® Floor Drain
Check the installation video
(Just scan the QR code!)

NEW BUILDING | KRASO® 4 Seal 10 bar | Rn Radon-tight | WU 1+2 | W1 -E W2.1 -E

KRASO® Drains for interior and exterior use

Inside and outside – tight and dry

+ For interior areas, basements, yards and parking levels:
  KRASO® Drains for a reliable and water pressure tight drainage of pressing water!
+ IAF-tested: radon-tight!
+ Walkable and fit for traffic, frost proof and odour-tight, backwater safe and thermally insulated:
  various versions for different needs!
+ High-quality components for a secure installation and use: solid wall material
  with thermally welded **KRASO® 4 Seal**, plastic or stainless steel grates
+ Additional accessories available as completion for individual needs
+ DafStB waterproof concrete guideline: stress class 1 + 2, with foil flange DIN 18533 W1 -E

KRASO® Floor Drains - according to DIN EN 1253

KRASO®
Floor Drain

KRASO®
Floor Drain
with foil flange

KRASO®
Floor Drain for KG 2000

KRASO®
Floor Drain
- thermally insulated -

KRASO® Floor Drains - frost proof/backwater safe

KRASO®
Floor Drain Type FS
frost proof

KRASO®
Floor Drain Type FS for KG 2000
with foil flange
frost proof

KRASO®
Floor Drain Type FS – RS
frost proof - backwater safe -

KRASO®
Floor Drain Type FS - RS
with foil flange
frost proof - backwater safe -



KRASO® Floor Drain LG 1

according to DIN EN 1253 – for the installation in interior areas without traffic, for the drainage of grey water, drainage capacity: 1.7 l/s, with water pressure tight surrounding **KRASO® 4 Seal**. Also available with **KRASO® Foil Flange**, oil- and bitumen resistant (d = approx. 50 cm). For the integration of the foil flange, we recommend our adhesive and sealant **KRASO® PU 50. | DafStB waterproof concrete guideline: stress class 1 + 2, with foil flange DIN 18533 W1 -E**

Item	KRASO® Floor Drain • KRASO® Floor Drain with foil flange
Drainage capacity	1.7 l/s
Height	drain approx. 110 mm
Insert frame	steplessly rotatable and height-adjustable from 30 - 70 mm
Plastic grate (standard)	class K3 (withstands loads up to 300 kg), 15 x 15 cm
Connection	KG/HT pipes either DN 50 or DN 110 vertical
KRASO® Floor Drain	**93 €**
KRASO® Floor Drain with foil flange	**136 €**
KRASO® PU 50	**22 €**

Scope of supply: **KRASO® Floor Drain**, plastic grate class K3, odour stopper, sludge trap filter, building period protective cover • **KRASO® Floor Drain with foil flange**, plastic grate class K3, odour stopper, sludge trap filter, building period protective cover

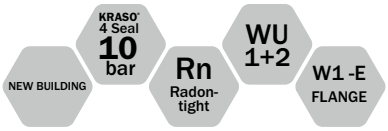

KRASO® Floor Drain for KG 2000 LG 1

according to DIN EN 1253 – for the installation in interior areas without traffic, for the drainage of grey water, drainage capacity: 1.7 l/s, with water pressure tight surrounding, thermally welded **KRASO® 4 Seal**. Also available with **KRASO® Foil Flange**, oil- and bitumen resistant (d = approx. 50 cm). For the integration of the foil flange, we recommend our adhesive and sealant **KRASO® PU 50. | DafStB waterproof concrete guideline: stress class 1 + 2, with foil flange DIN 18533 W1 -E**

Item	KRASO® Floor Drain for KG 2000 • KRASO® Floor Drain for KG 2000 with foil flange
Drainage capacity	1.7 l/s
Height	drain approx. 110 mm
Insert frame	steplessly rotatable and height-adjustable from 30 - 70 mm
Plastic grate	class K3 (withstands loads up to 300 kg), 15 x 15 cm
Connection	KG 2000/HT pipes either DN 50 or DN 110 vertical
KRASO® Floor Drain for KG 2000	**118 €**
KRASO® Floor Drain for KG 2000 with foil flange	**159 €**
KRASO® PU 50	**22 €**

Scope of supply: **KRASO® Floor Drain for KG 2000**, plastic grate class K3, odour stopper, sludge trap filter, building period protective cover • **KRASO® Floor Drain for KG 2000 with foil flange**, plastic grate class K3, odour stopper, sludge trap filter, building period protective cover

M-1.4.2.3-PK.DE-v1.1-01.26-WeS.DK