


KRASO® Floor Penetration Type BDF
Check the installation video
(Just scan the QR code!)

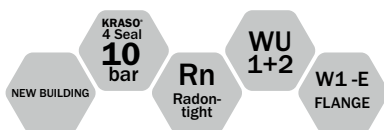

KRASO® Floor Penetration Type BDF

Simple, tight and approved

- + **KRASO® 4 Seal** – MPA-tested up to 10 bar!
- + IAF-tested: radon-tight!
- + Made of dimensionally stable and pressure-resistant solid wall material: low abrasion, easy installation at low temperatures
- + Also available for KG 2000: polypropylene (PP-MD), mineral-filled, smooth walls, long-lasting
- + Also available with oil- and bitumen resistant **KRASO® Foil Flange**
- + Formed plug-in sleeve on one side for connection to KG/HT pipes
- + Including **KRASO® Cover** as building period protective cover
- + Also available as thermally insulated floor penetration!
- + DafStB waterproof concrete guideline: stress class 1 + 2, with foil flange DIN 18533 W1 -E



KRASO® Floor Penetration Type BDF **LG 1**

for connection to KG/HT pipes, also available with **KRASO® Foil Flange**, oil- and bitumen resistant, surrounding approx. 15 cm. For the integration of the foil flange, we recommend our adhesive and sealant **KRASO® PU 50** | DafStB waterproof concrete guideline: stress class 1 + 2, with foil flange DIN 18533 W1 -E

Item	KRASO® Type BDF • KRASO® Type BDF with foil flange							
	110	125	160	200	250	315	400	500
Diameter DN	110	125	160	200	250	315	400	500
Delivery length (in cm)	50							
KRASO® Type BDF	39 €	42 €	51 €	67 €	132 €	203 €	256 €	395 €
KRASO® Type BDF with foil flange	74 €	80 €	87 €	118 €	187 €	256 €	414 €	563 €
KRASO® PU 50	22 €							

Scope of supply: KRASO® Type BDF or KRASO® Type BDF with foil flange, KRASO® Cover as building period protective cover

Further diameters and lengths from 50 cm available on request!