


... for more than 40 years +

**KRASO**<sup>®</sup>  
SIMPLE + TIGHT

All rights to the drawings and designs are the property of KRASO GmbH & Co. KG. •  
Reproduction and distribution of the drawings as well as any other use require our written consent. •  
The provisions of the currently valid abP\* (general building authority test certificate) always apply.

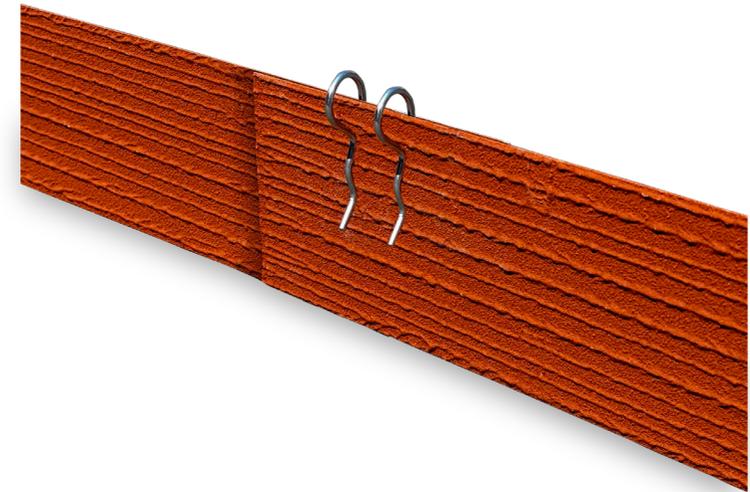


## KRASOflex<sup>®</sup> Joint Plate ZVB 100

### Installation instructions



**KRASO GMBH & CO. KG**  
Baumannweg 1 | DE-46414 Rhede  
T +49(0)28 72 - 95 35-0  
info@kraso.de | **KRASO.de**




8.9.1.1-MA.EN-v1.0-10.25-RSc.DK

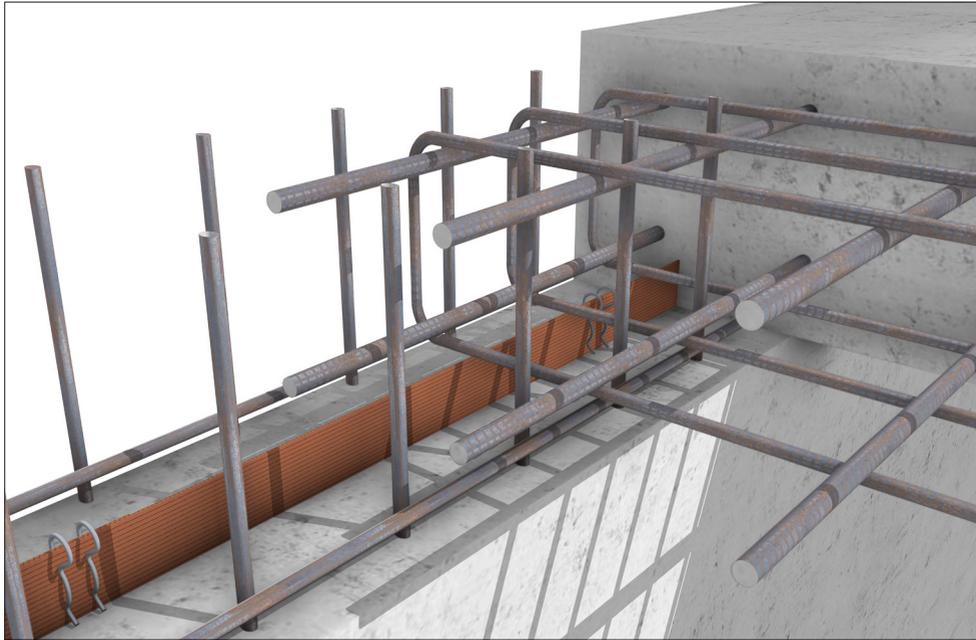










## KRASOflex® Joint Plate ZVB 100

Cement-composite plate with mineral special coating for the sealing of concrete elements in contact with soil with high water penetration resistance against soil moisture, non-pressurised and pressurised water in the area of construction joints – primarily at the transition from the wall crown to the ceiling – in accordance with abP.

### Storage and accessories



### Processing

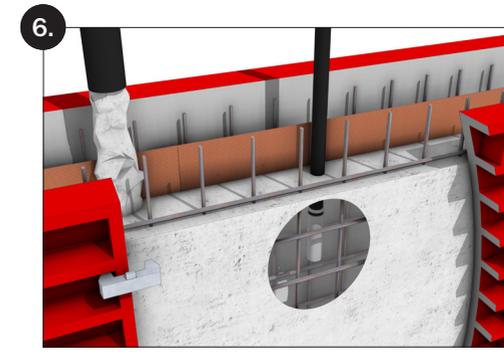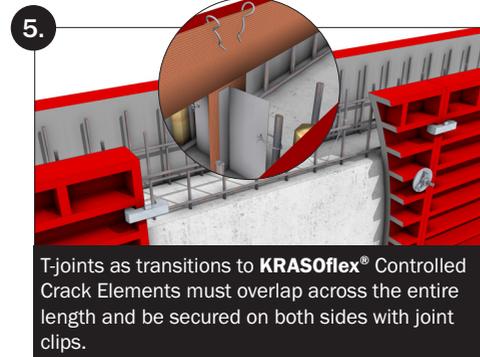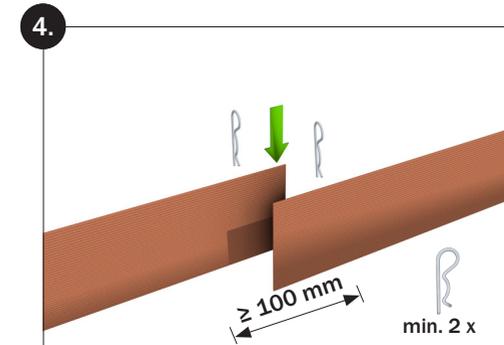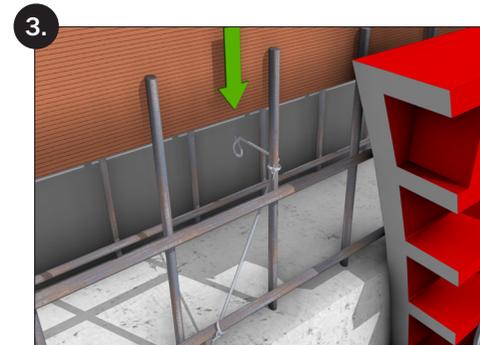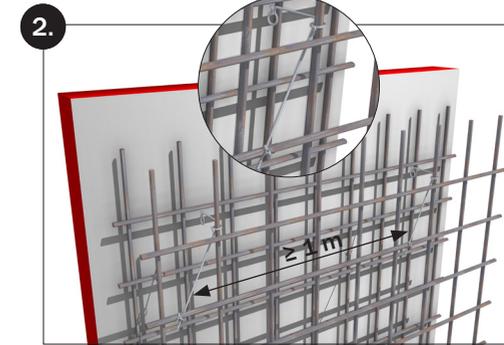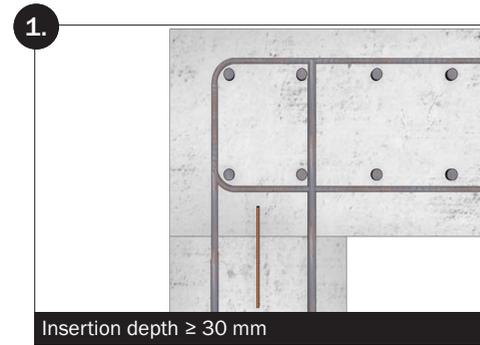

### Execution of overlapping joints in accordance with abP

#### Overlaps water tight:

1.  $\geq 100$  mm by pressing together over the entire surface
2.  $\geq 50$  mm by additional adhesion with KRASOflex® Mounting Adhesive

#### Overlaps water and radon-tight:

3.  $\geq 55$  mm by additional adhesion with KRASOflex® Mounting Adhesive
- Always secure overlapping joints with KRASOflex® Joint Clips!